




UL style 2464 多芯线 Multiple-conductor Cable

产品说明

额定温度：80℃
额定电压：300V
参考标准：UL758,UL1581,CSA C22.2 No210.0
导体使用单支或绞合32~16AWG镀锡或裸铜
PVC绝缘，符合RoHS环保标准
通过UL VW-1, CAS FT1/FT2阻燃测试
绝缘厚度均匀，易裁线，易剥皮
用于一般电子、电品设备内部接线

PRODUCT DESCRIPTION

Rated temperature: 80℃
Rated voltage: 300V
Reference standard: UL758, UL1581, CSAC22.2 No.21.0
Solid or stranded, tinned or bare copper conductor 32~16AWG
PVC insulation, compliance with RoHS environmental standard
Passes UL VW-1, CSA FT1/FT2 flame test
Uniform insulation thickness to ensure easy stripping and cutting
for general purpose internal wiring of appliance

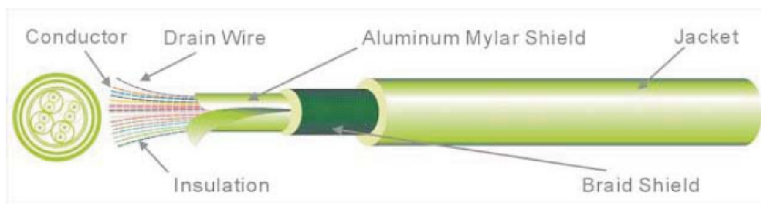

印字内容 MARKING (Refer)

E336285 AWM 2464 xxAWG VW-1 80℃ 300V AWM IA 80℃ 300V FT1 ZHONGZHENG-LF-

产品结构 CONSTRUCTION

规格 AWG	构造 CONSTR. (No./mm)	外径 DLA (mm)	芯数 Cores (mm)	绝缘 INSULATION		屏蔽 SHIELD 材质 MATERIAL	排流线 DRAIN 构造 No./mm	屏蔽 SHIELD 缠绕/编织 No./mm	护套 JACKET		最大导体电阻 MAX.COND. RESISTANCE (Ω/km20℃,DC)	包装方式 PACKING (M/FT)
				厚度 THICKNESS (mm)	外径 O.D. (mm)				厚度 THICK. (mm)	外径 O.D. (mm)		
30	7/0.10	0.30	2 3	0.25	0.80	Al-mylar	7/0.10	16/4/0.10	0.76	3.80	381	610M/2KFT
				0.25	0.80				0.76	3.90		
28	7/0.127	0.38	2 3	0.26	0.90	Al-mylar	7/0.127	16/5/0.10	0.76	4.00	239	610M/2KFT
				0.26	0.90				0.76	4.50		
26	7/0.16	0.48	2 3	0.26	1.00	Al-mylar	7/0.16	16/5/0.10	0.76	4.50	150	610M/2KFT
				0.26	1.00			16/6/0.10	0.76	5.00		
24	11/0.16	0.61	2 3	0.25	1.10	Al-mylar	11/0.16	16/5/0.10	0.76	4.50	94.2	610M/2KFT
				0.25	1.10				0.42	5.00		
22	17/0.16	0.76	2 3	0.27	1.30	Al-mylar	17/0.16	16/6/0.10	0.76	4.80	59.4	305M/1KFT
				0.27	1.30				0.76	5.00		
20	26/0.16	0.94	2 3	0.28	1.50	Al-mylar	26/0.16	16/7/0.10	0.76	4.80	36.7	305M/1KFT
				0.28	1.50			16/8/0.10	0.76	5.10		
18	41/0.16	1.18	2 3	0.31	1.80	Al-mylar	41/0.16	16/8/0.10	0.76	5.50	23.2	305M/1KFT
				0.31	1.80				0.76	5.70		

Please feel free contact to us of availability of other specification & colors